


Shielded HV Cable

3330007

30kVdc - AWG22 - PE

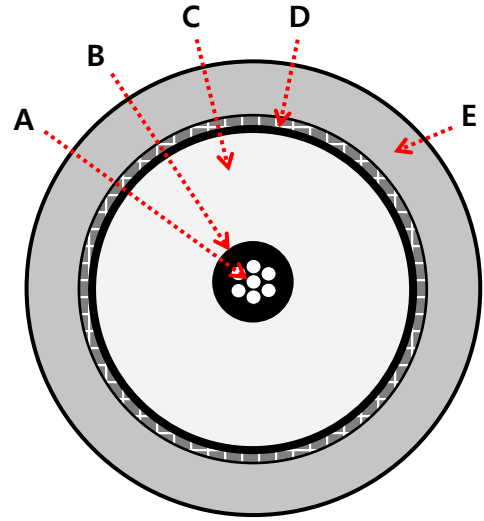

CONSTRUCTION

A	Conductor	AWG22 Cu/Sn (7x0.25)	ø0.75mm
B	Semicon	HDPE	ø1.45mm
C	Dielectric	HDFRPE (red)	ø3.9mm
D	Screen	CuSn , Coverage ≥83%	ø4.4mm
E	Jaket	PVC (red)	ø5.4mm

TECHNICAL DATA

Rated Voltage	30kVdc
Impedance	Typ. 58.7Ω/km
Capacitance	Typ. 76-97pF/meter
Min. Bend Radius	54mm (Fixed)
Operating Temperature	-25°C ~ +90°C
RoHS Compliant	Yes
Weight	41Kg/km
Color	Red

RELATED PRODUCTS

Connector : HSB10, HSB11, HSB20, HSB21, HSB30, HSB31