


# Shielded HV Cable

## 3330086

5kVdc - AWG26 - 6 wires stranded

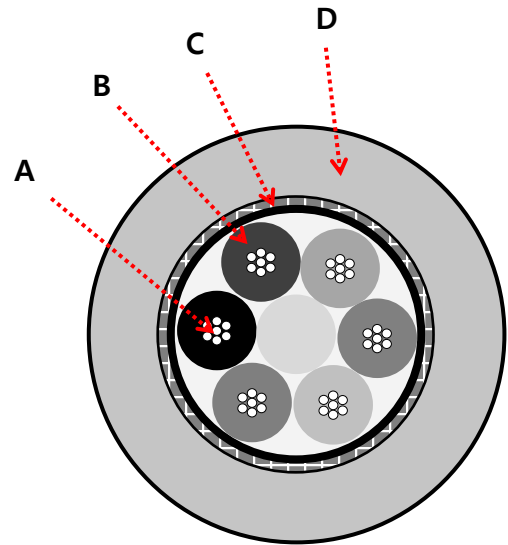

Operating Voltage	5 kVDC
Test Voltage	7.5 kVDC
Number of Wires	6
Construction	6 Wires Stranded
<b>A. Conductor</b>	
AWG	AWG 26
Strands	7 x 0.16mm
Cross Section	0.14mm <sup>2</sup>
Conductor Material	Tinned Copper
<b>B. Dielectric</b>	
Diameter	1.6mm[.063"](±0.1mm)
Material	FEP
Encoding	Grey, Black, Blue, Green, Yellow, Brown
<b>C. Screen (Shield)</b>	Yes
Coverage	About 85%
Material	Tinned Copper
<b>D. Jacket</b>	
Diameter	7.9mm[.311"](±0.3mm)
Material	Silicone
Color	Red
Temperature Range	-30°C ~ +180°C
Fits Connector Type	MCS605



High Voltage Products. High Voltage Experts.

A1.0 (230118)

**HVP Korea Co., Ltd.**

#601, Hyundai Bldg, Mapo-Daero 15, Mapo-Gu, Seoul, Korea, 04165 | Tel: +82 2 795 7667 | hvpkorea@hvp.kr | www.hvp.kr