


UnShielded HV Cable

C2024

60kVdc/20kVac - AWG12 - Silicone Dielectric

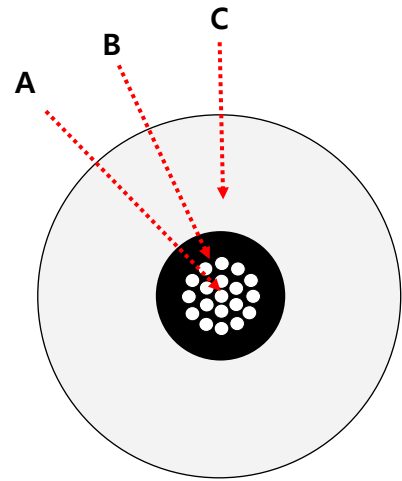

CONSTRUCTION

| | | | |
|---|------------|--------------------------------------|----------------------------------|
| A | Conductor | #12AWG (19x#25) Silver Plated Copper | 3.31mm ² ϕ 2.3mm |
| B | Semicon | Semiconductive Silicone (black) | ϕ 3.4mm |
| C | Dielectric | Silicone (white) | ϕ 9.1mm |

TECHNICAL DATA

| | |
|-----------------------|------------------|
| Rated Voltage | 60kVdc / 20kVac |
| Impedance | Typ. 38 Ω |
| Capacitance | Typ. 187pF/meter |
| Min. Bend Radius | 13mm (fixed) |
| Operating Temperature | -65°C ~ +200°C |
| RoHS Compliant | Yes |
| Weight | 0.112kg/meter |
| Color | White |

RELATED PRODUCTS

Connector - Please consult with HVP Korea Co., Ltd.