


Unshielded HV Cable

C2121A

150kVdc / 45kVac - AWG12 - LDHMMW PE

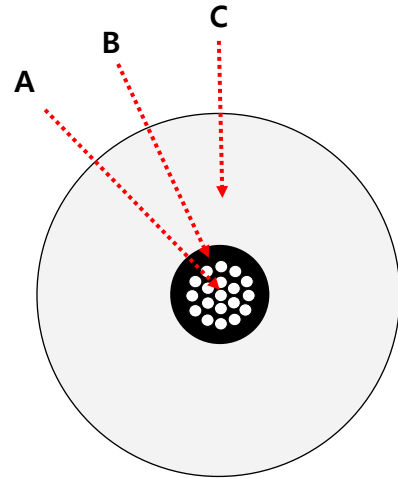

CONSTRUCTION

A	Conductor	AWG12 (19xAWG25 t.p.c)	3.31mm ²
B	Semicon	Polyethylene	Ø3.3mm±0.25mm
C	Dielectric	LDHMMW PE	Ø12.4mm±0.25mm

TECHNICAL DATA

Rated Voltage	150kVdc / 45kVac
Impedance	Typ. 59Ω
Capacitance	Typ. 95pF/meter
Min. Bend Radius	178mm (Fixed)
Operating Temperature	-51°C ~ +60°C
RoHS Compliant	Yes
Weight	Ca. 0.13kg/meter
Color	Natural

RELATED PRODUCTS

Connector - Please consult with HVP Korea Co., Ltd.



High Voltage Products. High Voltage Experts.

A1.0 (200904)

HVP Korea Co., Ltd.

#601, Hyundai Bldg, Mapo-Daero 15, Mapo-Gu, Seoul, Korea, 04165 | Tel: +82 2 795 7667 | hvpkorea@hvp.kr | www.hvp.kr