


Unshielded HV Cable

C2124A

100kVdc / 30kVac - AWG16 - LDHMMW PE

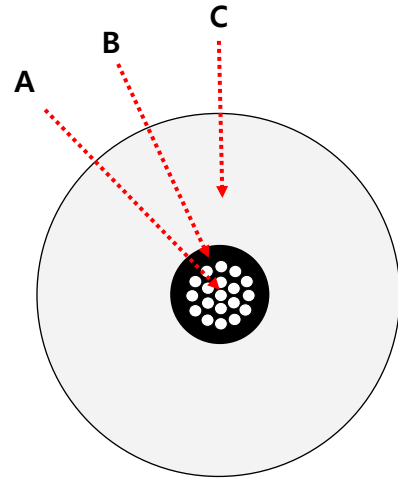

CONSTRUCTION

A	Conductor	AWG16 (19xAWG29 t.p.c)	1.31mm ²
B	Semicon	Polyethylene	Ø2.5mm ±0.25mm
C	Dielectric	LDHMMW PE	Ø9.4mm ±0.25mm

TECHNICAL DATA

Rated Voltage	100kVdc / 30kVac
Impedance	Typ. 61Ω
Capacitance	Typ. 98pF/meter
Min. Bend Radius	127mm (Fixed)
Operating Temperature	-51°C ~ +60°C
RoHS Compliant	Yes
Weight	Ca. 0.08kg/meter
Color	Natural

RELATED PRODUCTS

Connector : SB110, SB115, SB120, SB125, SB125Pro, SB130, SB135, SB150, SB155, SB160, SB165, SB1100



High Voltage Products. High Voltage Experts.

A1.0 (201201)

HVP Korea Co., Ltd.

#601, Hyundai Bldg, Mapo-Daero 15, Mapo-Gu, Seoul, Korea, 04165 | Tel: +82 2 795 7667 | hvpkorea@hvp.kr | www.hvp.kr