


Unshielded HV Cable

C2149

60kVdc/20kVac - AWG18 - LDHMMW PE Dielectric

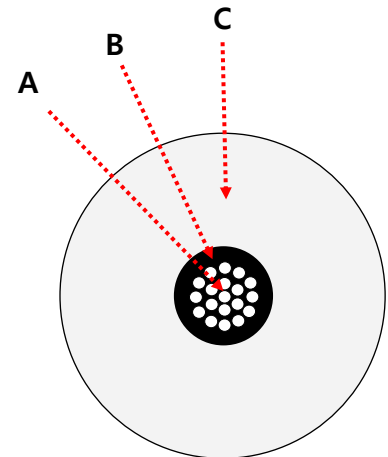

CONSTRUCTION

A	Conductor	#18AWG Cu/Sn (19x#30 t.p.c)	0.97mm ² ϕ 1.24mm
B	Semicon	Semiconductive PE	ϕ 2.0mm
C	Dielectric	LDHMMW PE	ϕ 5.8mm

TECHNICAL DATA

Rated Voltage	60kVdc / 20kVac
Impedance	Typ. 50 Ω
Capacitance	Typ. 121pF/meter
Min. Bend Radius	64mm (fixed)
Operating Temperature	-51°C ~ +60°C
RoHS Compliant	Yes
Weight	0.03kg/meter
Color	Natural

RELATED PRODUCTS

Connector - Please consult with HVP Korea Co., Ltd.